


DATE:

CUSTOMER:

PROJECT:

QUANTITY:

PLLDI.28 *Round 36W / 49W / 97W / 209W LED Direct / Indirect Pendant-Mounted Light*

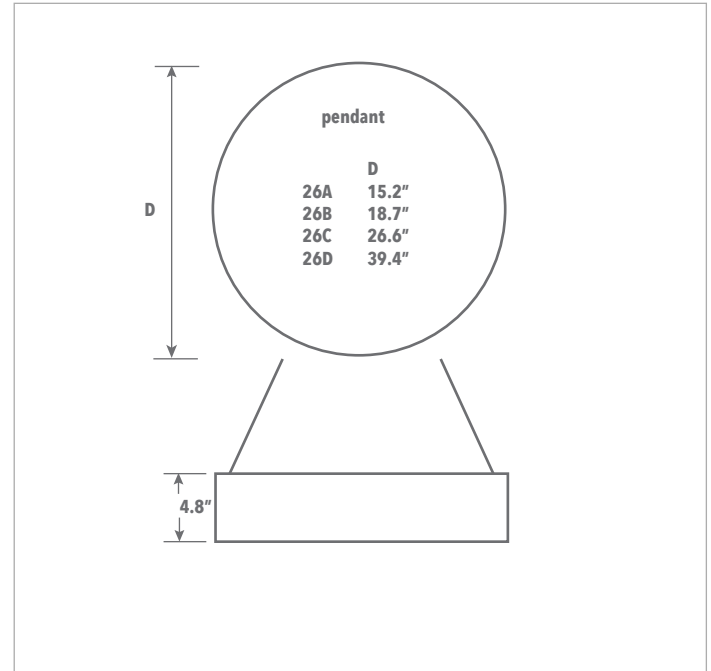

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	DIFFUSER	FINISH	DRIVER	CRI	INPUT VOLTAGE
PLLDI	PLLDI.28C	97W	9300lm	40	P	S	A	80	120



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	DIFFUSER	FINISH	DRIVER	CRI	INPUT VOLTAGE	
PLLDI	PLLDI.28A	36W	3220lm	30	3000K	O Opal	W WHITE	N Non-Dim	80 CRI80	120 120V input
	PLLDI.28B	49W	4200lm	40	4000K	P Prismatic	S SILVER	A 0-10V	90 *CRI90	277 277V input
	PLLDI.28C	97W	9300lm					C Consult		
	PLLDI.28D	209W	18330lm							

NOTES	Prestigious pendant luminaire with round design for homogenous and sophisticated direct and indirect architectural lighting, no UV and thermal emissions, metal housing, easy ceiling mounting, wire-rope suspension to be ordered separately, opal white diffuser made from UV and heat-resistant acrylic glass, 5-pole terminal block, LED converter integrated.	* CRI90 (subject to availability) INCLUDED: Ø 5.0" mounting plate	WEB LINKS: Product Page
--------------	--	---	-----------------------------------