


DATE:

CUSTOMER:

PROJECT:

QUANTITY:

PLLDI.26 *Round 36W / 49W / 97W / 209W LED Direct / Indirect Surface-Mounted Light*

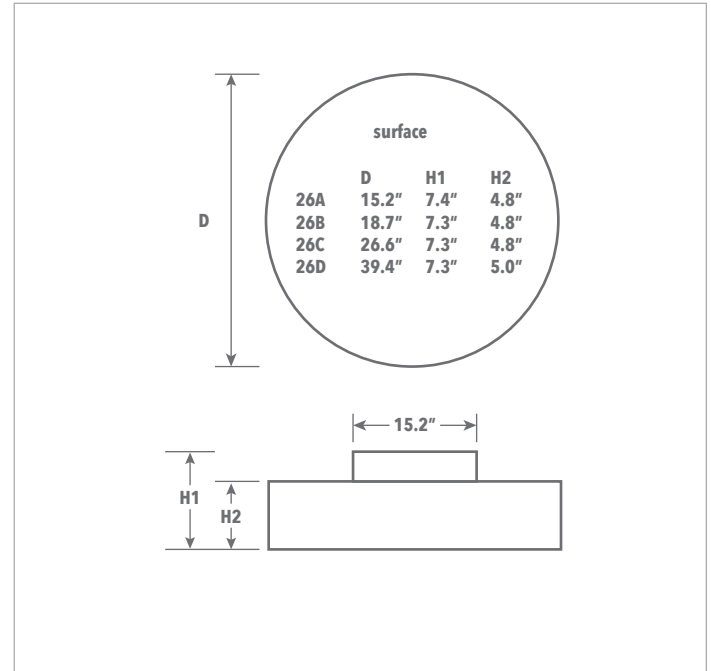

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	DIFFUSER	FINISH	DRIVER	CRI	INPUT VOLTAGE
PLLDI	PLLDI.26B	49W	4200lm	30	O	W	A	80	120



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	DIFFUSER	FINISH	DRIVER	CRI	INPUT VOLTAGE	
PLLDI	PLLDI.26A	36W	3220lm	30	3000K	O Opal	W WHITE	N Non-Dim	80 CRI80	120 120V input
	PLLDI.26B	49W	4200lm	40	4000K	P Prismatic	S SILVER	A 0-10V	90 *CRI90	277 277V input
	PLLDI.26C	97W	9300lm					C Consult		
	PLLDI.26D	209W	18330lm							

NOTES	Prestigious surface-mounted luminaire with round design for homogenous and sophisticated direct and indirect architectural lighting, no UV and thermal emissions, metal housing, easy ceiling mounting, opal white diffuser made from UV and heat-resistant acrylic glass, 5-pole terminal block, LED converter integrated.	* CRI90 (subject to availability) INCLUDED:	WEB LINKS: Product Page