

DATE:


CUSTOMER:

PROJECT:

QUANTITY:

# LINKDID *D38140AU*

40W SMD 2835 Dark Light LED Suspended Linear Diffuser w/ Uplight

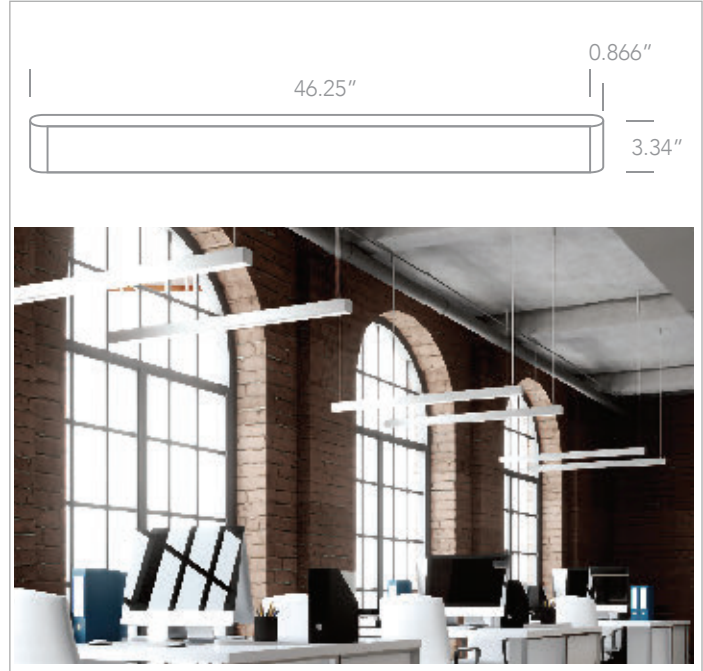

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
LINKDID	D38140AUBC	40W	3600lm	40	G	B	A	20	120



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
LINKDID									
	<b>D38140AUWC</b>	40W	3600lm	<b>40</b> 4000K	<b>G</b> GENERAL	<b>W</b> WHITE	<b>A</b> 0-10V	<b>20</b> IP20	<b>120/277</b> 120V - 277V
	<b>D38140AUWW</b>	40W	3600lm	<b>30</b> 3000K	<b>G</b> GENERAL	<b>W</b> WHITE	<b>A</b> 0-10V	<b>20</b> IP20	<b>120/277</b> 120V - 277V
	<b>D38140AUBC</b>	40W	3600lm	<b>40</b> 4000K	<b>G</b> GENERAL	<b>B</b> BLACK	<b>A</b> 0-10V	<b>20</b> IP20	<b>120/277</b> 120V - 277V
	<b>D38140AUBW</b>	40W	3600lm	<b>30</b> 3000K	<b>G</b> GENERAL	<b>B</b> BLACK	<b>A</b> 0-10V	<b>20</b> IP20	<b>120/277</b> 120V - 277V

<b>NOTES</b>	<b>D38140AU:</b> Each fixture includes a 5" round mounting plate for attaching to a standard 3" octagonal junction box. Color will match fixture.	<b>CCT:</b> 3000K CCT = Warm White 4000K CCT = Cool White	<b>WEB LINKS:</b>  <b>D38140AU</b>
	0-10V dimming option, available for 277V		