


DATE:

CUSTOMER:

PROJECT:

QUANTITY:

PLLMT.22XP *Round 22W / 39W / 75W / 164W LED Metal Trim Pendant-Mounted Light*

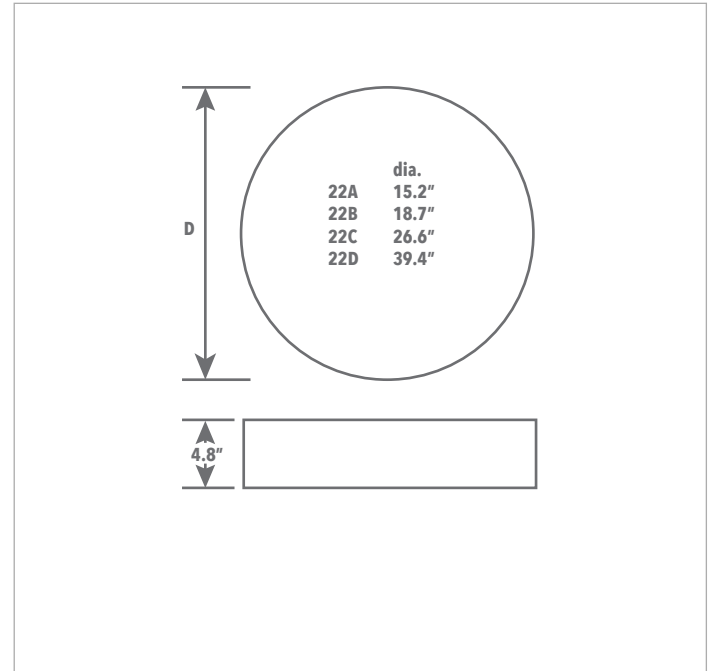

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	DIFF.	FINISH	DRIVER	CRI	INPUT VOLTAGE
PLLMT	PLLMT.22BP	39W	2450lm	30	O	S	N	80	120



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	DIFFUSER	FINISH	DRIVER	CRI	INPUT VOLTAGE	
PLLMT										
	PLLMT.22AP	22W	1300lm	30	3000K	O Opal	S Silver	N Non-Dim	80 CRI80	120 120V input
	PLLMT.22BP	39W	2450lm	40	4000K	P Prismatic	W White	A 0-10V	90 *CRI90	277 277V input
	PLLMT.22CP	75W	5500lm				C Consult			
	PLLMT.22DP	164W	12080lm							

NOTES	Prestigious pendant-mounted with round design for homogenous and sophisticated architectural lighting, no UV and thermal emissions, metal housing, easy ceiling mounting, wire-rope suspension to be ordered separately opal white diffuser made from UV and heat-resistant acrylic glass, 5-pole terminal block, LED converter integrated.	* CRI90 (subject to availability) INCLUDED: Ø 5.0" mounting plate	WEB LINKS: Product Page